

R 101 DN 25



Pe = Pu max. 8 bar
Pa = Pd 22-1.200mbar
Q max. 200 Nm³/h
 (300) Nm³/h*

KG-Values

V 17,5 186 Nm³/h
V 27,5 459 Nm³/h


Gas characteristics:

suitable for gas of the gas families 1, 2, 3 (DVGW-G260) and not aggressiv gas.

Ambient-/ -20...+60°C
Working temp.


Fitting position any

Flow speed max. 30m/s
 (limit 60m/s)*

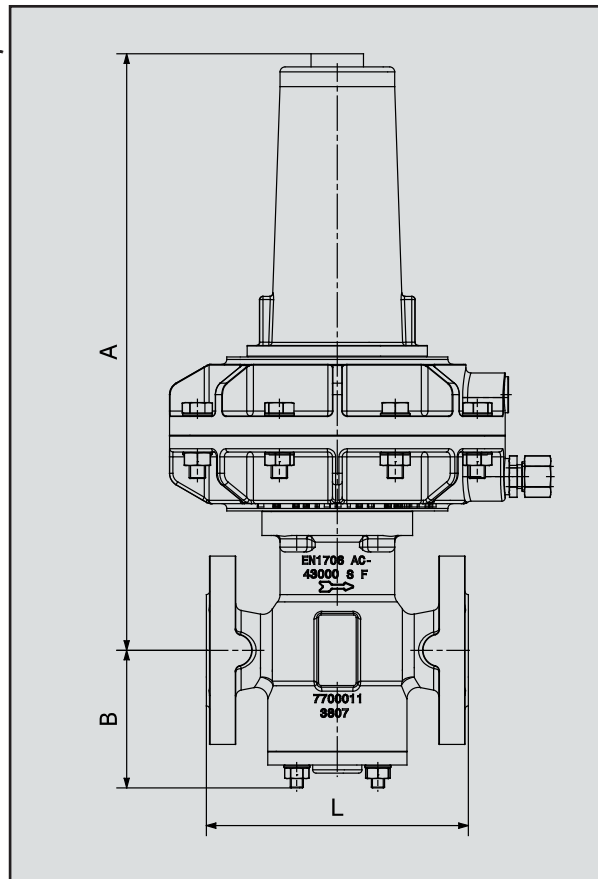


Special design:
 high pressure shaft


* after consulting MEDENUS

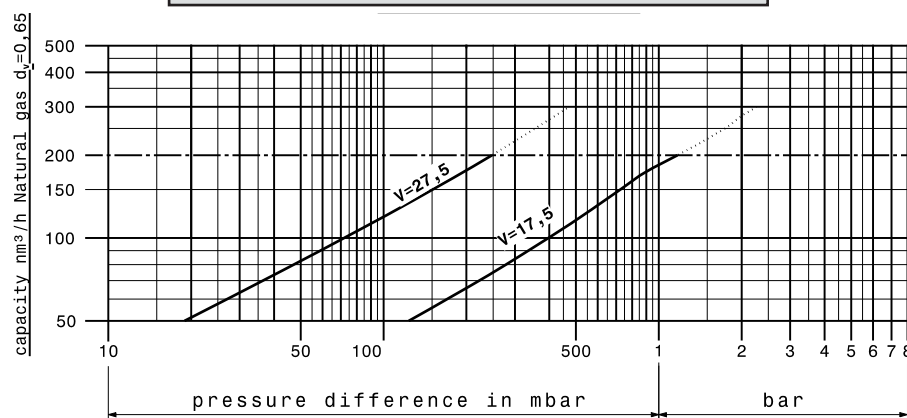

Pd < 200 mbar
200 - 800 mbar**
 10,5kg
 PN16
 A=346mm
 B= 84mm
 L=160mm
 Ø 318

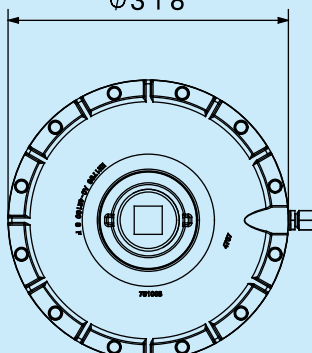

Pd < 750 mbar
750 - 1.200 mbar**
 8kg
 PN16
 A=364mm
 B= 84mm
 L=160mm
 Ø 205



** high pressure shaft

Pd < 1.200 mbar
 6,5kg
 PN16
 A=356mm
 B= 84mm
 L=160mm
 Ø 160

