



Safety Relief Valve SL 10

Product information



ΕN

Subject to modifications! Reprint prohibited!

Table of Contents

Application, Characteristics, Technical Data	4
Application	4
Characteristics	4
Type of model / Options (see page 10)	4
Technical data	5
Structure and function	6
Sectional view	7
Valve seat diameter, measuring unit diameter	8
Diaphragm assembly setpoint spring table	8
Dimensions, Connection, and Weight	9
Dimensions and weight	9
Dimensional drawing	9
Connections	9
Types of Models / Options	10
Order Data	12
Contact	13



Observe the following publications in relation to **ATTENTION** installation, start-up and maintenance: DVGW - work sheets G 491 and G 600 Operating and Maintenance Instructions SL 10

List of abbreviations and formula symbols

AC	Accuracy class	p_{dso}	Upper SSV response pressure	W_{dso}	Upper spring adjustment range
AG_{\circ}	Upper response pressure	$p_{ds u}$	Lower SSV response pressure		(SSV)
	group	$p_{f,max}$	Maximum closing pressure	$W_{ds u}$	Lower spring adjustment range
AG_{u}	Lower response pressure	PS	Maximum allowable pressure		(SSV)
	group	p_u	Inlet pressure	Δр	Pressure difference from
BV	Breather valve	Q_n	Standard volumetric flow rate		inlet pressure to
GPR	Gas pressure regulator	RE	Diaphragm assembly		outlet pressure
HDS	High-pressure spindle	RSD2	Throttle valve	Δp_{wo}	Min. re-engagement difference
$K_{_{G}}$	Valve flow rate coefficient	SSV	Safety shut-off valve		between upper
р	Pressure	SRV	Safety relief valve		response pressure and
p_d	Outlet pressure	SG	Closing pressure group		normal operating pressure
p _{df}	SRV closing pressure	t_{Gas}	Gas inlet temperature	Δp_{wu}	Min. re-engagement difference
p _{do}	SRV opening pressure	VS	Valve seat		between lower
p _{ds}	Setpoint of the	W_d	Outlet gas velocity		response pressure and
	response pressure	W_{u}	Inlet gas velocity		normal operating pressure
				ρ_{n}	Gas density

Application, Characteristics, Technical Data

Application

Safety relief valve (SRV), direct-acting (operating without auxiliary power), for systems acc. to DVGW work sheets G 491 (A) and G 600 (A) (TRGI)

Can be used as an equipment component on gas consumption facilities as defined in Regulation (EU) 2016/426. Can be used for the gases defined in DVGW work sheet G 260 / G 262 and neutral non-aggressive gases. (other gases on request)

Characteristics

- Integral pressure-tight version (IS)
- Class A
- Position-independent installation
- High level of response accuracy
- Open-air model

Type of model / Options (see page 10)

- AV breather valve
- Oxygen model
- Hydrogen model
- Coating with epoxy resin in RAL colors

Technical data

Type SL 10

Model Integral pressure-tight (IS)

Max. allowable pressure PSStandard: 5 bar (thread-sealing)

Option: 8 bar, (Ermeto-Fitting, acc. to DIN 30690-1)

Max. inlet pressure p_{II.max} 3.5 bar</sub>

Nominal width Rp 1" (DN 25), Rp 1½" (DN 40), Rp 2" (DN 50)

(NPT thread on request)

Type of connection Internal thread acc. to EN 10226-1

Material

Housing / actuator housing Al - cast alloy

Corrosivity category DIN EN ISO 12944-2

C1 to C5-I without additional coatings

C5-M an epoxy resin coating is recommended (see page10)

Temperature range, Class 2 -20°C to +60°C

(operating/ambient temperature)

Accuracy class AC 5

Closing pressure group SG 10

Function, strength and tightness DIN EN 33821

CE mark acc. to PED/ PIN number CE-0085-AQ0879

Ex protection The mechanical parts of the device do not have any


potential ignition sources of their own and therefore do not fall within the scope

of ATEX 95 (94/9/EC). Electrical components fitted to the device

comply with the ATEX requirements.

Preferred installation position

The gas pressure regulators S10 shall be installed in the pipeline preferably in horizontal position. For all nominal widths, the direction of flow is indicated by an arrow on the housing.

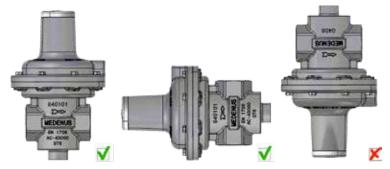

Installation upside down only after consultation with Medenus GmbH

Note: Observe the following documents in relation to installation, start-up, and maintenance:


- DVGW work sheets G 491 and G 600
- Operating and Maintenance Instructions SL 10



Structure and function


The spring-loaded safety relief valve SL 10 is used for reducing short-term pressure surges upstream of gas consumption systems or preventing an inadmissibly high pressure increase due to escaping gas, and is intended to protect downstream system components from excessive pressure levels.

The safety relief valve is composed of the actuator housing and the "control device" functional unit. In the closed position, the gas flows into the actuator housing in the direction of the arrow. The internal measurement line port is used to pass the outlet pressure to be regulated to the bottom of the main diaphragm of the safety relief valve. It compares the actual value with the command variable preset by the force of the setpoint spring. The setpoint required in each case is set via the setting screw. When the setpoint is exceeded, the measuring unit will lift the actuator, allowing the gas to escape via the blow-off line. If the actual value falls below the setpoint, the measuring unit will close the actuator again automatically.

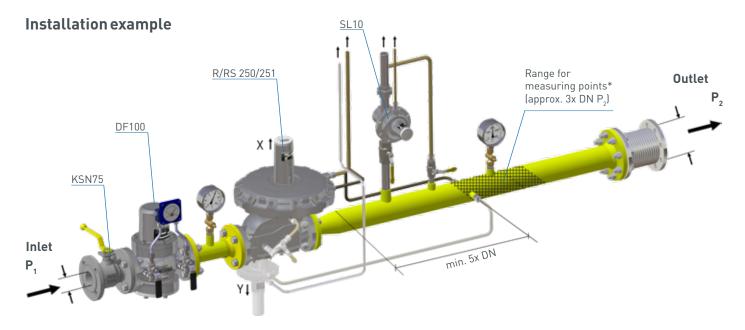

^{*)} Recommended max. velocity at the measurement line port 25 m/s

Sectional view

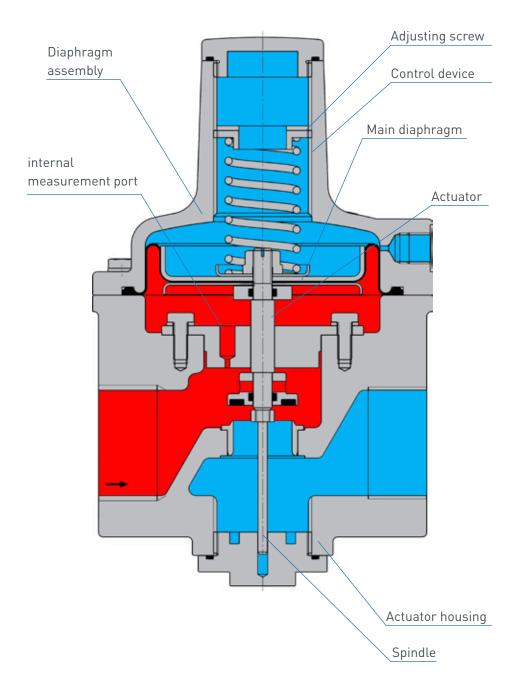

Valve seat diameter, measuring unit diameter

Nominal wid	lth	Connection	Valve seat Ø (mm)	maximum flow rate K _G -value [m³/(h*bar)]	Diaphragm assembly				
DN 25		Rp 1	20	200	160				
DN 40		Rp 1½	25	350	160				
DN 50		Rp 2	25	430	160				

Diaphragm assembly setpoint spring table

Pressure range (mbar)	Spring	ı data
	Spring no.	Color [RAL]
20 - 39	FG100	9006
35 - 71	FG101	5015
55 - 131	FG102	6018
105 - 275	FG103	3020
215 - 575	FG104	5010
415 - 1050	FG105*	6010
900 - 1950	FG106**	7035
1750 - 3560	FG107**	1028

© 11.2023_01


^{*)} with high-pressure spring plate (HD1)

^{**)} with high-pressure screw spindle (HD2)

Dimensions, Connection, and Weight

Dimensions and weight

Nominal width DN	Connection	Ø (mm)	A (mm)	B (mm)	L (mm)	HD2 (mm)	X (mm)	Weight (kg)	Weight HD2 (kg)
25	Rp 1	145	173	57	100	112	180	2.5	0.4
40	Rp 1½	145	173	61	140	112	180	3.5	0.4
50	Rp 2	145	173	61	160	112	180	3.5	0.4

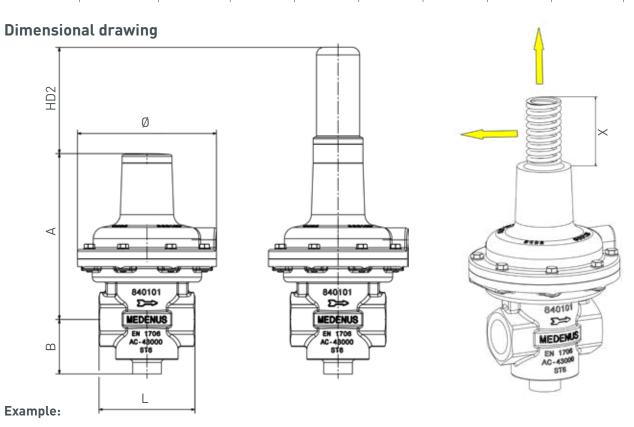

SL10/Rp 1" with HD2

Weight (SRV + HD2): 2.5 kg + 0.4 kg = 2.9 kgDimensions (A + HD2): 173 mm + 112 mm = 285 mm

Connections

Nominal width	Breather line
DN 25	Connection* for:
DN 40	Tube 10 x 1.5
DN 50	(thread G 1/4)

Note

Observe the following publications in relation to installation, start-up, and maintenance: DVGW - work sheets G 491 and G 600

Operating and Maintenance Instructions SL 10

For all nominal widths, the direction of flow is indicated by an arrow on the housing.

*) Threaded pipe connections to DIN EN ISO 8434-1 (DIN 2353)

Types of Models / Options

AV breather valve

The AV breather valve is used to secure the installation room against inadmissible escape of gas from diaphragm comparator compartments of safety shut-off valves. In case of a defect, the impermissible escape of gas into the surrounding atmosphere is limited to a maximum of 30l/h (air).

It also serves as a substitute for an expensive and complex installation of breather lines.



(Option not available for hydrogen version H₂)

Epoxy resin coating in RAL colors

To protect the safety relief valves from external influences, starting from a corrosivity category C5-M we recommend an epoxy resin coating.



Types of models

Oxygen model 0,

Hydrogen model H₂ (with helium leak test)

The Medenus gas pressure regulators are suitable for use with hydrogen as a medium up to a proportion of 100%. Further information can be found in the special edition (10/2019) of gwf Gas+Energie and on our homepage at (www.medenus.de)



Properties of Gases

- for natural gas (ρ_n = 0.83 kg/m³; t = 15°C) f natural gas conversion factor- L

Gas	f	Hs,n	Gas	f	Hs,n
		[kWh/m³]			[kWh/m³]
Acetylene	0.84	16.25	Sewage gas	0.84	
Ammonia	1.04	4.83	Carbon monoxide	0.81	3.51
Butane	0.55	37.23	Carbon dioxide	0.65	-
Chlorine	0.51	-	Air	0.80	-
Landfill gas	approx. 0.80		Methane	1.08	11.06
Natural gas L	1.00	9.77	Propane	0.64	28.03
Natural gas H	1.03	11.45	Oxygen	0.76	-
Ethane	0.78	19.55	Sulphur dioxide	0.53	-
Ethylene	0.97	16.516	Nitrogen	0.81	-
Mine gas	(30% CH4)	0.86	Hydrogen	3.04	13.43
Helium	2.15	-			

Notes		

Order Data

Example:	Safety relief valve:	SL10/Rp1"/BV/WAZ/So												
	Order code:	SL10	Rp1"	WAZ	So									
Order selection	Designation													
Туре														
SL10	SL10	SL10												
DN - Nominal width	Table p. 8		Rp1"											
Acceptance test certificate to EN 10204/3.1														
without acceptance test certificate	-													
with acceptance test certificate	WAZ			WAZ										
Special model	So*				So									
- Coating with epoxy resin in RAL colors - Oxygen model														

We recommend, for systems with regulators up to DN 100 our SL10-Rp 1" up to DN 150 our SL10-Rp 1 $\frac{1}{2}$ " up to DN 200 our SL10-Rp 2"

*)	
↑ I	e.g.:
,	C.q.,

• Coating with epoxy resin in RAL colors

• Oxygen model

In every selection group, there is only one option that can be selected.

Note	5																						

12

Contact



Management ALEXANDER CHRISTIANI

Phone: +49 (0) 2761 / 82788-18 Mail: a.christiani@medenus.de



Technical Inside Sales Department MINDAUGAS PECKAITIS

Phone: +49 (0) 2761 / 82788-23 Mail: m.peckaitis@medenus.de



Head of Inside Sales Department MANUEL SCHEPP

Phone: +49 (0) 2761 / 82788-20 Mobile phone: +49 (0) 170 / 6355309 Mail: m.schepp@medenus.de



Inside Sales Department SEBASTIAN HUCKESTEIN


Phone: +49 (0) 2761 / 82788-11

Mail: s.huckestein@medenus.de



Inside Sales Department STEFANIE MÜLLER

Phone: +49 (0) 2761 / 82788-13 Mail: s.mueller@medenus.de

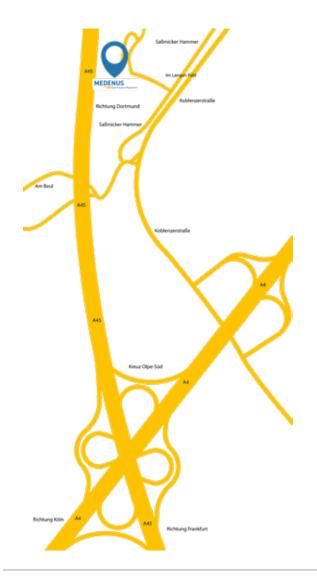

If you want to know more about solutions from MEDENUS for the gas industry, please contact your local contact person or go to our internet site at www.medenus.de

Trade representation worldwide medenus.de/de/kontakt.html

MEDENUS

Gas-Druckregeltechnik GmbH

Im Langen Feld 3 D-57462 Olpe

Phone: +49 (0)2761 82788-0
Fax: +49 (0)2761 82788-9
Mail: info@medenus.de
Internet: www.medenus.de



THE MEDENUS PLUS

10 reasons for good business relations

- 1. Consultancy expertise and quality standards developed over decades
- Broad and proven standard range of feedback controllers
- Modern, fast and efficient production for series products and for individual orders
- Customer-specific design of pressure regulators and vacuum regulators and special designs
- Guaranteed deadline compliance with a delivery deadline guarantee
- Fast response time in all matters
- 7. Sufficiently large parts storage for production and spare parts
- Customer-specific theory & practice training courses
- 9. Modular design right across the entire product range to facilitate optimized handling of spare parts
- 10 Made in Germany

In the download area of our homepage, this document is available in different languages. You can use the following QR codes and links to go directly to this document in your language.



Deutsch:

http://medenus.de/files/upload/downloads/SL10/Pi_SL10_de.pdf



English:

http://medenus.de/files/upload/downloads/SL10/Pi_SL10_en.pdf

Notes	

